



Rectifiers

Silicon Rectifiers

Part #	Phase	Amps	Volts	Duty Cycle	H	W	L
226 981	1 PH	180	400 PIV	35%	8-5/8"	1-9/16"	4"
142 503	1 PH	300	400 PIV	60%	9-1/2"	4"	5-1/4"
230 777	1 PH	150	400 V	30%	5-5/8"	3-1/8"	4-15/16"
193 191	1 PH	140	400 V	35%	7.875"	3.938"	1.08"
225 516	3 PH	300	400 PIV	35%	7.875"	3.938"	1.08"
228 056	1 PH	250	400 PIV	100%	9.455"	4.924"	3.940"
219 533	1 PH	150	400 PIV	40%	5-5/8"	3-1/8"	4-15/16"
193 316	1 PH	180	400 PIV	35%	7.3875"	3.938"	1.809"
225 516	3 PH	300	400 PIV	100%	12.0170"	5.910"	4-13/70"

Integrated Bridge Rectifiers with Mounting Compound

Part #	Amps	Volts	H	W	L	Terminal Size
035 704	40	800	3/4"	1-1/8"	1-1/8"	1/4"

Important Product Note: Don't be fooled by after-market offerings of this component. The Miller original equipment rectifier is rated at 800 volts versus others at 400 volts. The difference results in longer life and is comparatively a much better value!


Enclosed Relays

Part #	Number of Pins	Form	Operating Current	Coil Rating @ 60 Hz	Mounting Type	Group	Terminal Size
219 494	4	SPST	5.0 A @ 120 VAC	120 VAC	Flange	A	1/4"
059 267	8	DPDT	10.0 A @ 120 VAC & 28 VDC	12 VDC	Flange	A	3/16"
113 247	8	DPDT	20.0 A @ 120 VAC & 28 VDC	12 VDC	Flange	A	1/4"
044 588	11	3PDT	10.0 A @ 120 VAC & 28 VDC	12 VDC	Flange	A	3/16"
110 386	8	DPDT	5.0 A @ 120 VAC & 28 VDC	24 VAC	Flange	A	3/16"
052 964	8	DPDT	10.0 A @ 120 VAC & 28 VDC	24 VDC	Flange	A	3/16"
006 393	8	DPDT	10.0 A @ 120 VAC & 28 VDC	24 VAC	Flange	A	3/16"
106 462	8	DPDT	20.0 A @ 120 VAC & 28 VDC	24 VDC	Flange	A	1/4"
109 006	8	DPDT	20.0 A @ 120 VAC & 28 VDC	24 VAC	Flange	A	1/4"
072 817	8	DPDT	20.0 A @ 120 VAC & 28 VDC	24 VAC	Flange	A	1/4"
186 162	8	DPTA	5.0 A @ 120 VAC	120 VAC	Flange	A	0.187"
188 184	9	DPTA	5.0 A @ 28 VAC	120 VAC	Flange	A	0.28"
116 592	11	3PDT	5.0 A @ 120 VAC & 28 VDC	24 VDC	Flange	A	3/16"
000 174	11	3PDT	10.0 A @ 120 VAC & 28 VDC	24 VAC	Flange	A	3/16"
080 388	11	3PDT	10.0 A @ 120 VAC & 28 VDC	24 VAC	Plug-In	A	3/16"
000 770	11	3PDT	10.0 A @ 120 VAC & 28 VDC	24 VDC	Flange	A	3/16"
052 603	8	DPDT	10.0 A @ 120 VAC & 28 VDC	110 VDC	Flange	A	3/16"
059 266	8	DPDT	10.0 A @ 120 VAC & 28 VDC	120 VAC	Flange	A	3/16"
009 338	11	3PDT	10.0 A @ 120 VAC & 28 VDC	110 VDC	Flange	A	3/16"
059 268	8	DPDT	20.0 A @ 120 VAC & 28 VDC	120 VAC	Flange	A	1/4"
039 498	11	3PDT	10.0 A @ 120 VAC & 28 VDC	120 VAC	Flange	A	3/16"
095 033	14	4PDT	1.0 A @ 120 VAC & 28 VDC	24 VAC	Plug-In	B	
095 521	14	4PDT	1.0 A @ 120 VAC & 28 VDC	24 VDC	Plug-In	B	
081 797	14	4PDT	5.0 A @ 120 VAC & 28 VDC	24 VAC	Plug-In	B	
027 810	14	4PDT	5.0 A @ 120 VAC & 28 VDC	24 VDC	Plug-In	B	
048 028	14	4PDT	3.0 A @ 120 VAC & 28 VDC	120 VAC	Plug-In	B	
093 558	14	4PDT	1.0 A @ 120 VAC & 28 VDC	120 VAC	Plug-In	B	


SPDT — single pole, double throw
DPDT — double pole, double throw

3PDT — three pole, double throw
4PDT — four pole, double throw

#142 504

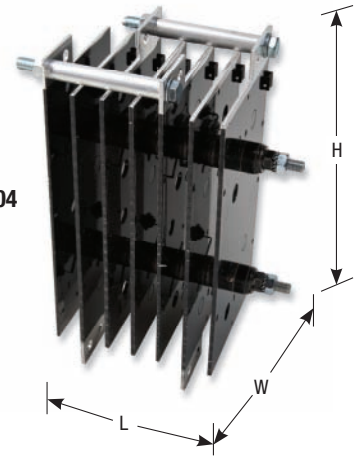

#035 704



Group A



Group B

